

INFILED

Bildkraft

RS Series

The Pinnacle of Lightweight Design & Tech Integration



Create a curved screen from -10° to 10°.

Adaptability with MagCube for building a 90° right-angle screen.

RS and Xmk3 cabinets enable curved screens from -45° to 45°.

Cabinets are 25-35% lighter than competitors.


Low power design and energy-efficient components.

The ultra-version integrates ArmorLED, ColdLED, and CBSF techs.


Quick-lock system and a nine-position arc setup.

Front and rear maintenance with a 5-second detachable PDU.


Supports hanging up to 15 meters and stacking up to 6 meters.




Live Events




Touring



Stage




Exhibition



DOOH

SPECIFICATIONS

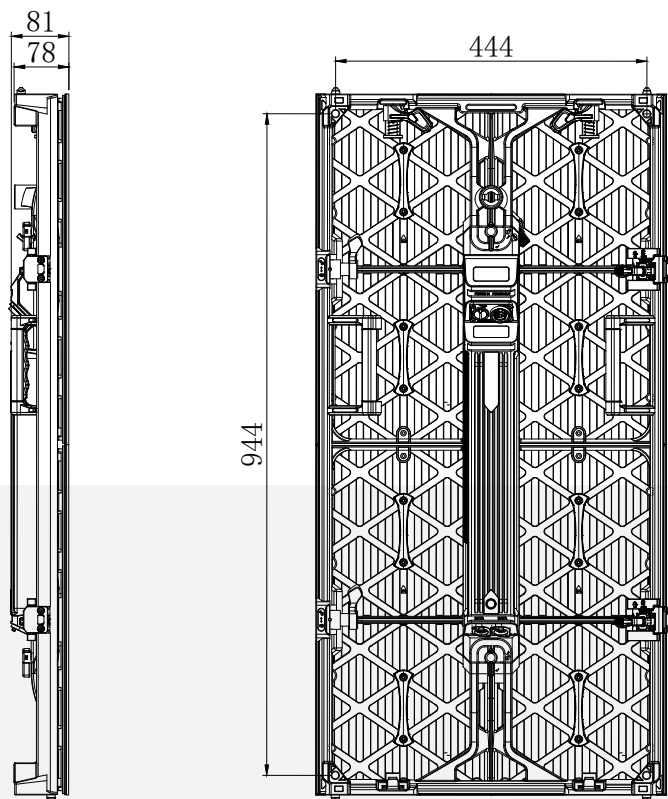

Indoor

Model Number

IL-RSS-IRRS2.5

Pixel Pitch	2.5mm
Physical Density	160,000 pixel/m ²
LED Package	SMD1415 black LED
Cabinet Resolution	200 x 400 pixels
Cabinet Dimensions	500 x 1000 x 81 mm
Cabinet Weight	9.2kg
Maintenance	Front / Rear
Cabinet Material	Die-casting Magnesium
Max Rigging / Max Stacking	15m / 6m
Brightness	1000-1200 nits
Viewing Angle	160° / 160°
Contrast Ratio	10000:1
Color Temperature	6500K(3500K~9000K adjustable)
Greyscale	16bits
Refresh Rate	7680Hz
Receiving Card	Brompton R2+
Scan Rate	1/25

The product specifications can be customized