

Integrates effortlessly with INFiLED rental products.

Innovative MagFrame specifies MagBar locations.

Flexible MagBars enable easy installation on the MagFrame.

ArmorLED Tech enhances impact resistance.


SolidSkin Tech enhances durability and display.

CBSF Tech improves colour consistency and uniform brightness.

Compatible with DB series stacking system

Creative screen setup supporting hanging installation.

Front and rear maintenance supported.












SPECIFICATIONS

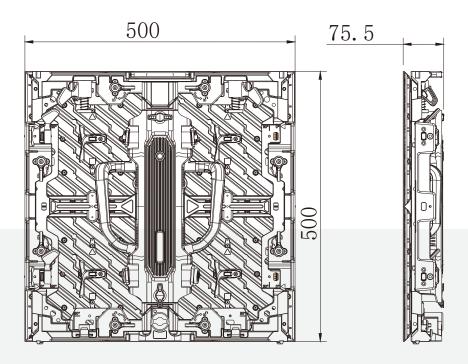

MagCube-Ultra Specification

General Information	Model Number	IL-RSS-IRMC2.5
	Pixel Pitch	2.5mm
	Environments	Indoor
Physical Parameter	Physical Density	160,000pixels/m²
	LED Arrangement	Full black led
	Cabinet Resolution	200 x 200 pixels
	Cabinet Dimensions (mm/inch)	500 x 500 x 75.5 mm
		(19.69 x 19.69 x 2.97 in)
	Cabinet Weight	8.1 kg (17.86 lb)
	Maintenance	Front & Rear.
	Cabinet Material	Die-cast magnesium
Optical Parameter	Brightness (After Calibration)	1200nits
	Viewing Angle	160° / 160°
	Contrast Ratio	10000:1
	Color Temperature	6500K(3000K~10000K adjustable)
Control System	Greyscale	16bit
	Refresh Rate	7680Hz
	Receiving Card	Brompton R2+

The product specifications can be customized.