



INFILED

Bildkraft

Xmk3 SERIES

An ultra-flexible curved display for various events

Engineered for seamless compatibility across rental setups

±45° flexible curvature with button-based adjustment

Seamless wave, arc, and cylinder screen configurations

Magnetic + pin connection for fast, flat alignment


ArmorLED enhances durability during transport and use

CBSF ensures consistent brightness and color across wide angles


SolidSkin offers moisture, dust, and impact protection

Delivers smooth, vivid visuals with 7680Hz and 16-bit grayscale


Stacking or hanging up to 9m for flexible setup




Live Events




Concert



XR&VP




Stage



Exhibition

SPECIFICATIONS

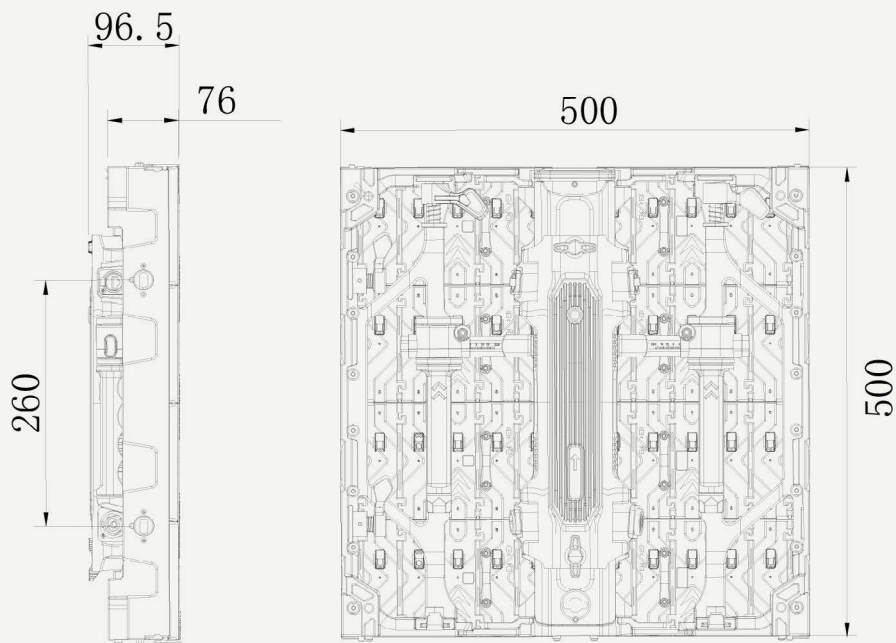

Model Number	IL-RSS-IRx2.5mk3
Pixel Pitch	2.5mm
Environment	Indoor
Physical Density	160,000 pixels/m²
LED Package	Full black led
Cabinet Resolution	200 x 200 pixels
Cabinet Dimensions (mm/inch)	500 x 500 x 96.5 mm (19.69 x 19.69 x 3.80 in)
Cabinet Weight (kg/lb)	7.7 kg (16.98 lb)
Maintenance	Rear
Cabinet Material	Magnesium Alloy
Brightness	1200nits
Viewing Angle	160°/160°
Contrast Ratio	10000:1
Color Temperature	6500K(3500K~9000K Adjustable)
Greyscale	16bit
Refresh Rate	7680Hz
Receiving Card	Brompton R2+

The product specifications can be customized